

## B-Two

Industrial power, ideal for medium-sized industrial environments, boilers, hot air generators and baking ovens. Equipped with removable display unit. High quality materials for long term performances.

Output: **200 kW**



### Features:



#### ECOLOGICAL

##### Nature thanks

- Heating with neutral CO<sub>2</sub> emissions
- Renewable energy which represents a safe investment for the future



#### COMFORT

##### Comfortable and safe

- Automatic combustion system.
- Automatic cleaning of the heating surfaces and of the burner
- Remote assistance and system monitoring available



#### COST-EFFECTIVE

##### Investment payback in the short term

- Operating costs reduced by up to 60% compared to diesel / gas systems
- High efficiency thanks to the most modern combustion technology
- Independent of trends in the market prices of fossil fuels
- Allows you to convert your system into a biomass system with only the replacement of the burner and therefore a far lower cost than buying a new boiler
- Quick return on investment

### Description

Burner for industrial heating. The compact dimensions make it easy to combine with different types of heating systems.

Designed with round combustion chamber, variable speed fan, internal auger for a more effective dosage, igniter and flame detection photocell.

For a more complete and reliable cleaning it is also possible to connect the device to an air compressor.

The burners is managed by a microprocessor control panel mounted on the appliance.



### Safety

**Safety thermostat** which interrupts the burner operation in case of temperature outside the combustion camera of the device higher than 70 °C.

**The self-extinguishing** flexible hose avoids the thermal connection between the burner and the fuel storage

**External auger fan** protects against any extraordinary smoke returns.

**Two-stage pellet loading** using an external auger that loads the fuel from the tank to the burner and an internal auger that conveys everything inside the combustion chamber.

**Security system** that locks and signals the system in lockout during any alarm situation

**Automatic start** after power failure thanks to the memory of recent settings

**Smart management of the heating system via smartphone and app.**


All basic operating parameters and functions are remotely manageable, for constant control wherever you are.




### Technical details

Model	B-Two		
Thermal capacity	Max	kW	240
	Min	kW	25
Consumption	Max	Kg/h	48
	Min	Kg/h	5
Power supply	V/Hz	230/50	
Average consumption	W	75	
Start-up	W	170	
Noise Level	dB	40	
Weight	Kg	45	

\* consumption calculated with certified wood pellets UNI EN 14961-2 con P.C.I. 5,2 kW/kg

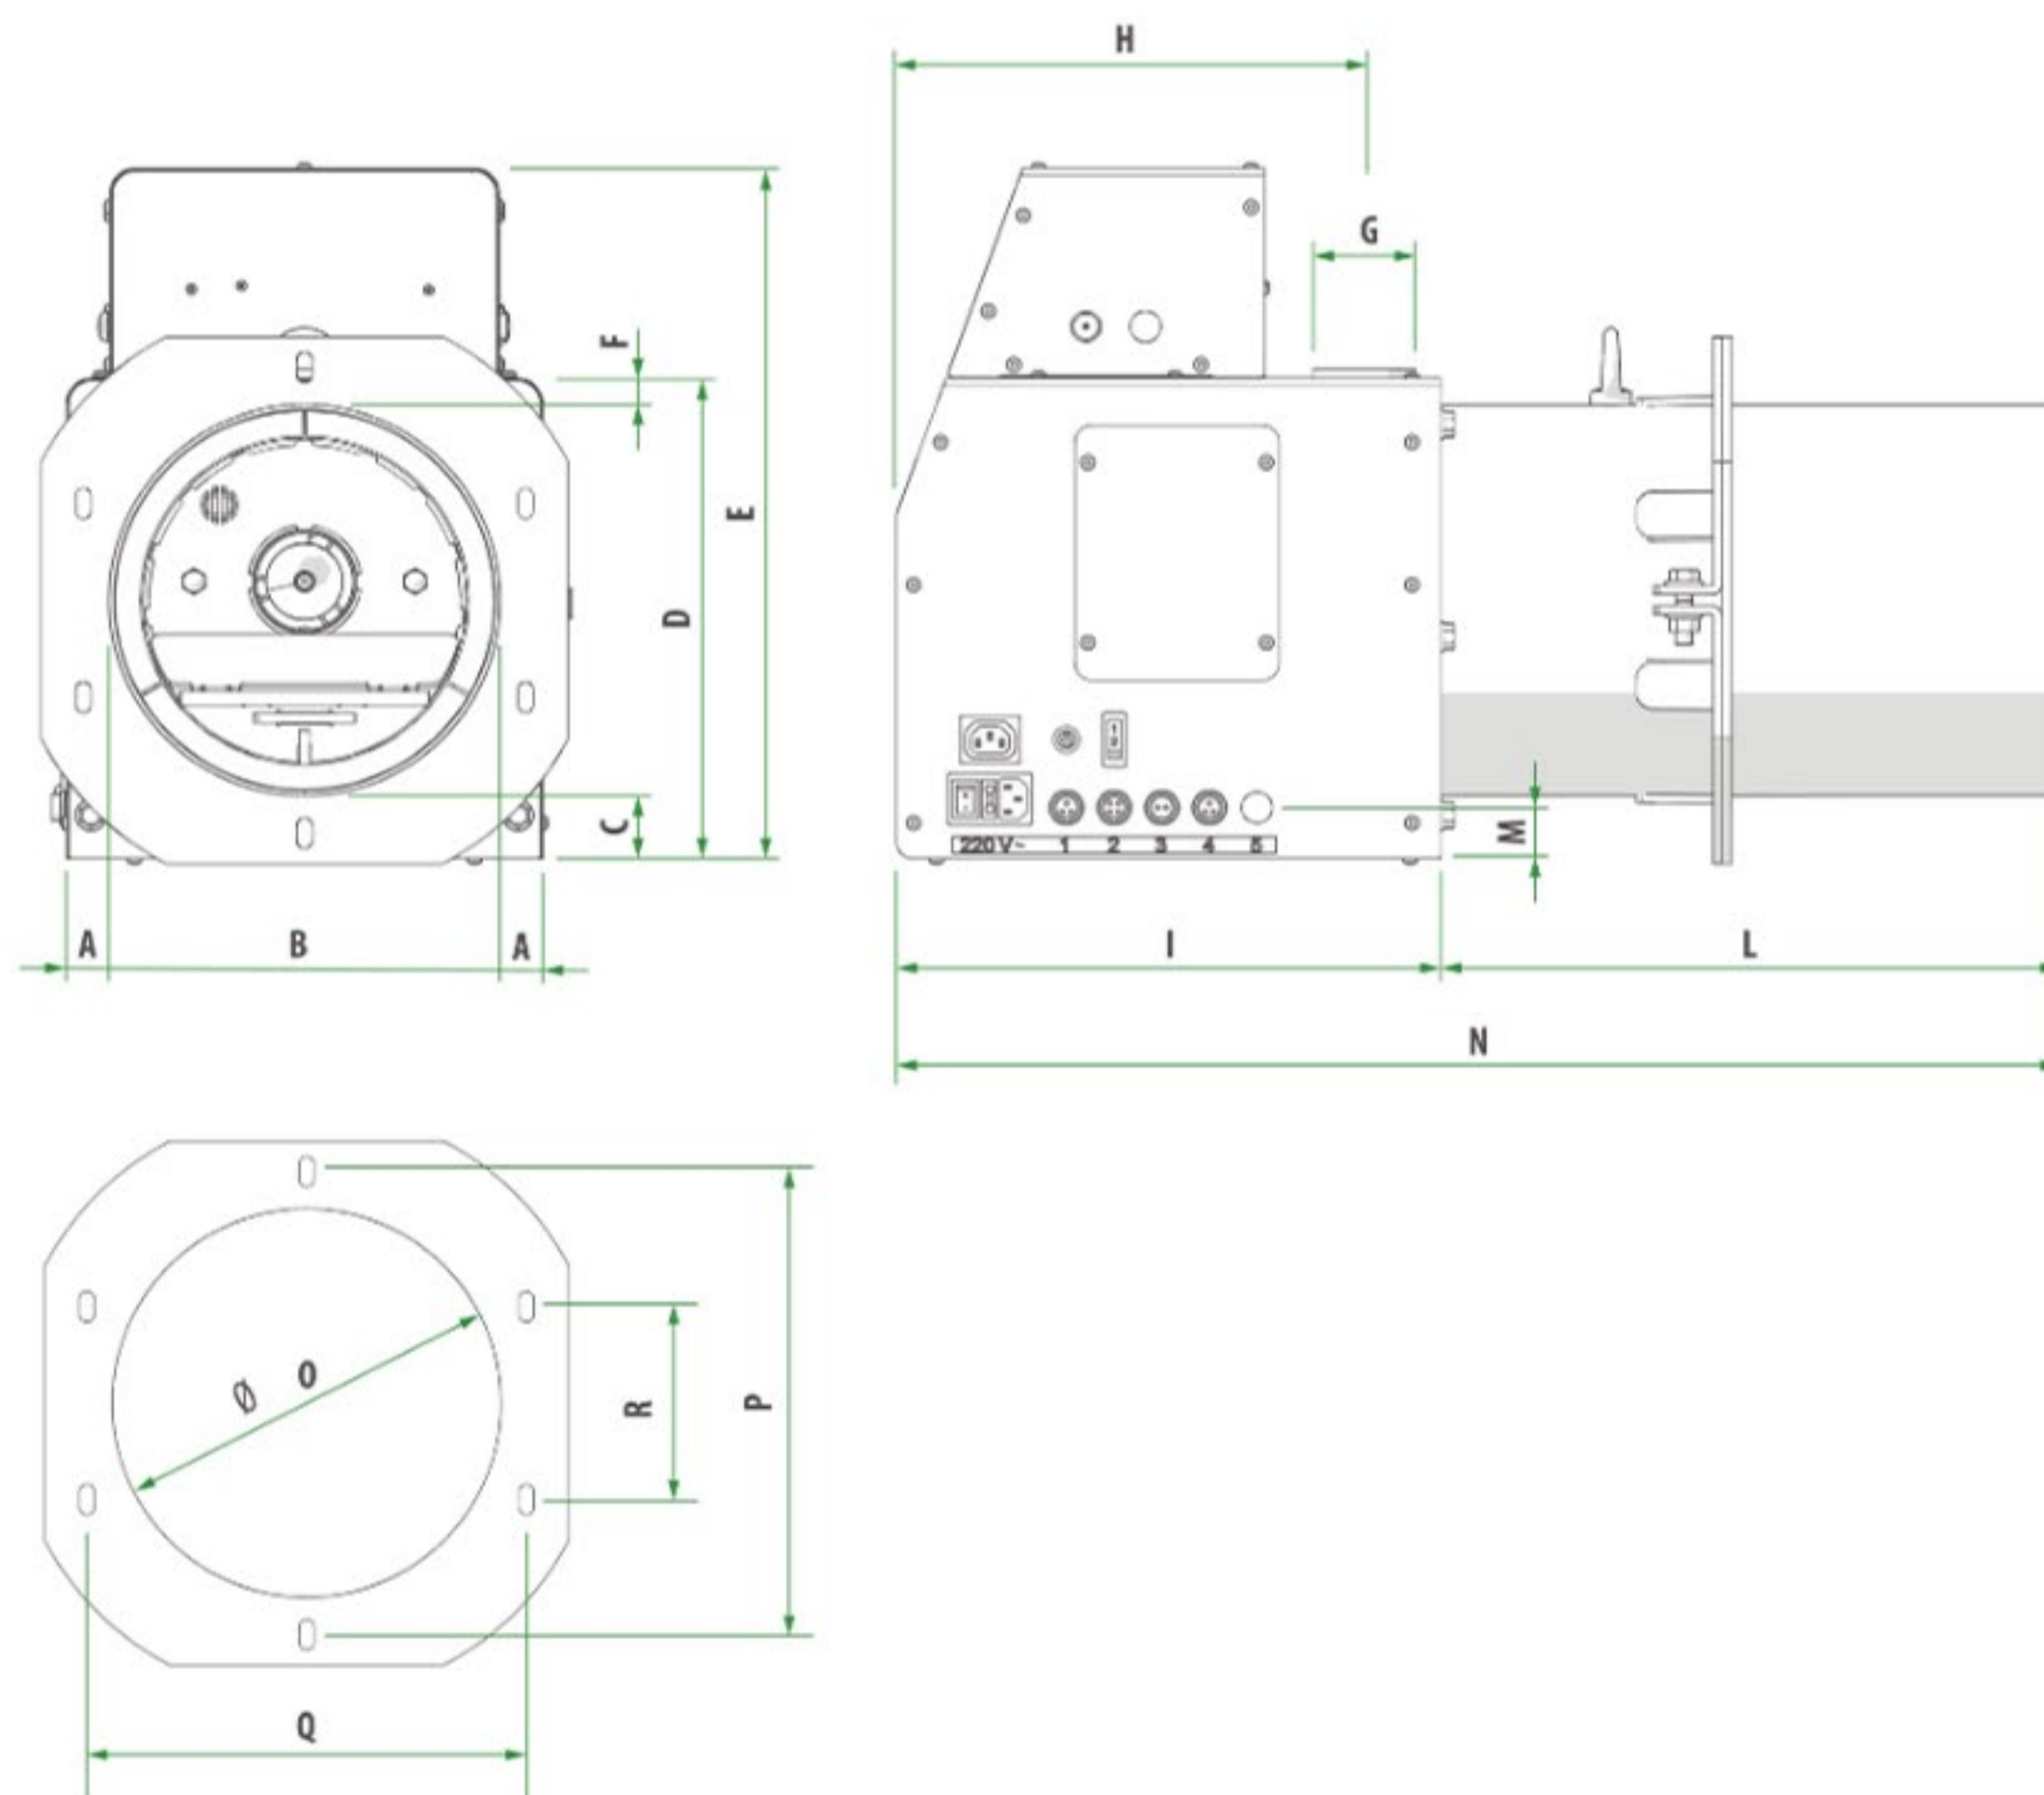

model	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q	R
	mm	mm	mm	mm	mm	Ø mm	mm	mm	mm	mm	mm	mm	Ø mm	mm	mm	mm
B-TWO	22,5	305	35,5	352	476	12,5	60	335	380	480	30	860	310	360	340	160

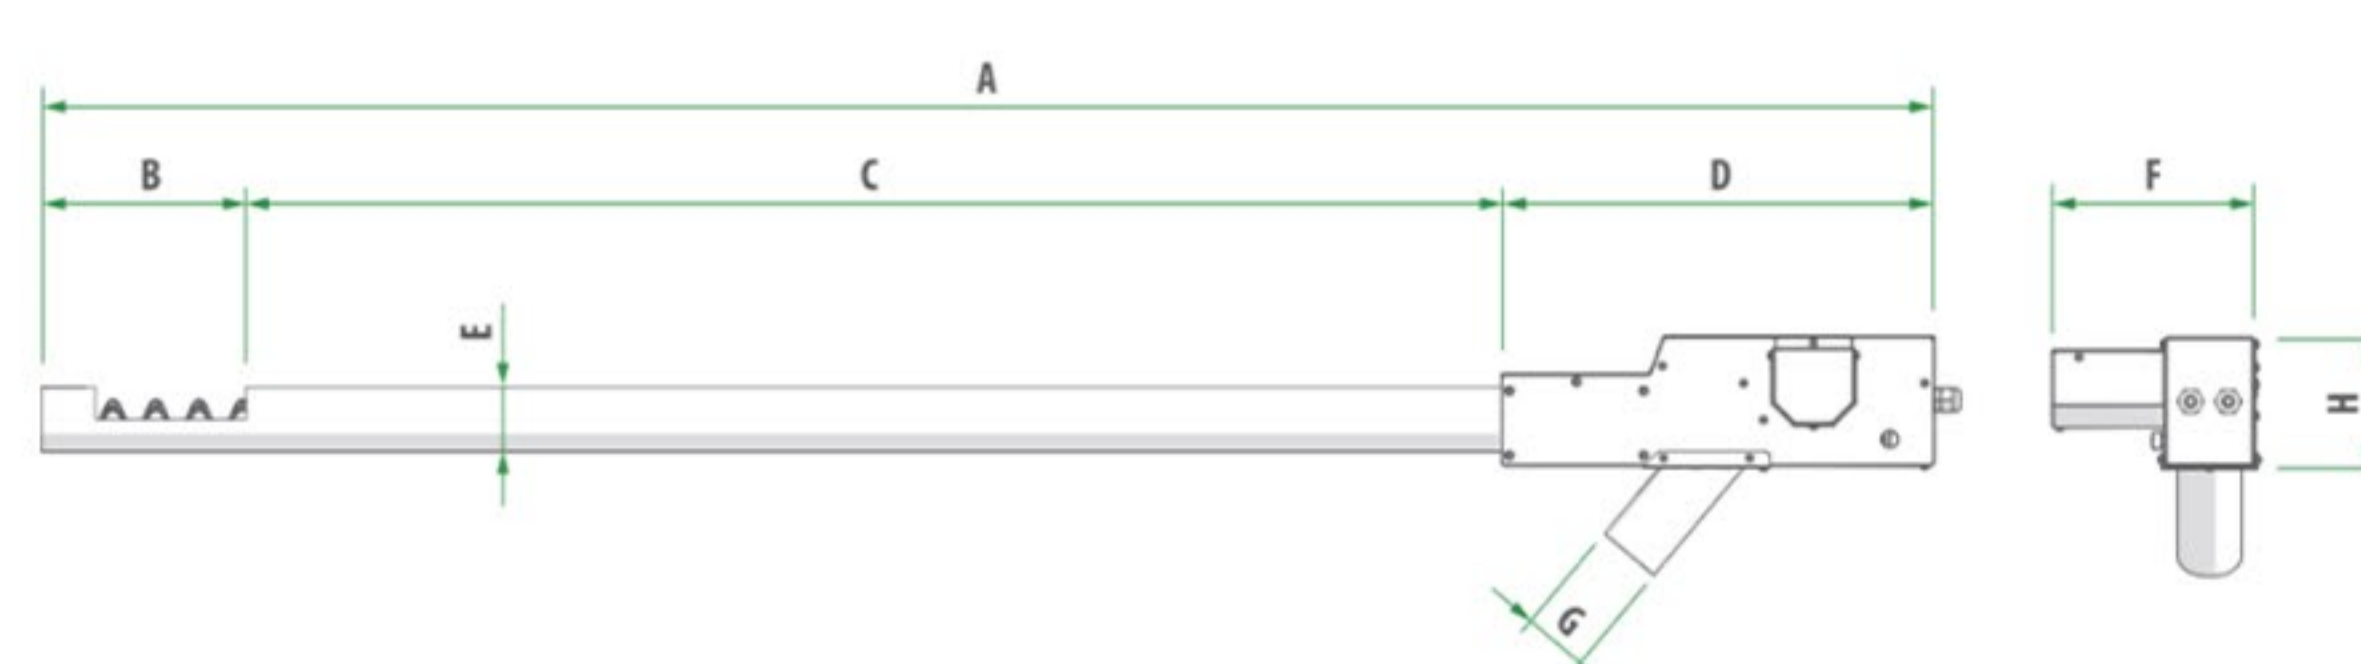

model	A	B	C	D	E	F	G	H	Weight
	mm	Ø mm	mm	mm	mm	mm	Ø mm	mm	kg
B-Two	1803	140	1200	461,5	80	140	60	215	18